


NOTE : INLET (MAX) AS SUCH THAT TOP OF CORED HOLE TO TOP OF RISER IS 300 mm MIN

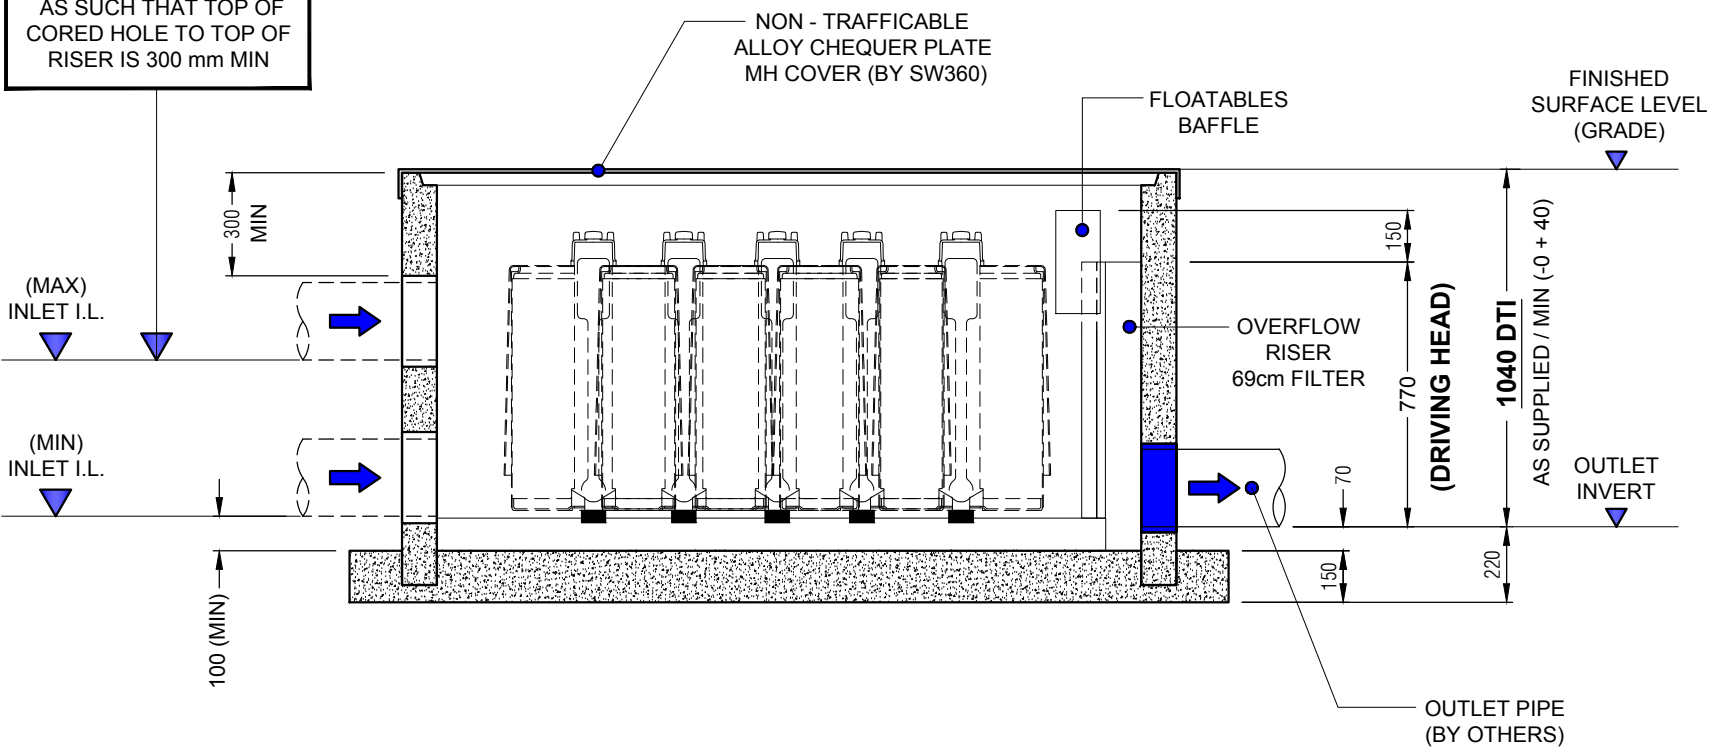

| TO BE COMPLETED BY CUSTOMER / CONTRACTOR            |                      |                      |                      |                      |                      |                      |
|---|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| COMPANY :   |                      |                      | P.O. NUMBER :        |                      |                      |                      |
| SITE ADDRESS :                                      |                      |                      |                      |                      |                      |                      |
| SITE CONTACT & PHONE :                              |                      |                      |                      |                      |                      |                      |
| PREFERRED DELIVERY DATE (TBC SW360) :               |                      |                      |                      |                      |                      |                      |
| STORMFILTER REFERENCE (IF APPLICABLE) :             |                      |                      |                      |                      |                      |                      |
| OUTLET HOLE Ø (CIRCLE) :<br>(TYPICAL PIPE MATERIAL) | Ø 275<br>(DN225 PVC) | Ø 300<br>(DN225 RRJ) | Ø 350<br>(DN300 PVC) | Ø 400<br>(DN300 RRJ) | Ø 500<br>(DN375 RRJ) | Ø 600<br>(DN450 RRJ) |
| LID LEVEL (RL) :                                    |                      |                      | OUTLET PIPE (IL) :   |                      | DTI :                |                      |
| COMPLETED BY :                                      |                      |                      | SIGNED :             |                      | DATE :               |                      |

| TO BE COMPLETED BY SW360    |                                   |                                 |                           |                          |
|-----------------------------|-----------------------------------|---------------------------------|---------------------------|--------------------------|
| SW360 PRODUCT CODE :        |                                   |                                 |                           |                          |
| MEDIA TYPE (CIRCLE ONE) :   | PERLITE                           | ZPG                             | OTHER :                   |                          |
| CARTRIDGE QTY (STATE) :     |                                   |                                 |                           | PRE-INSTALLATION (Y/N) : |
| SP FLOW RATE (CIRCLE ONE) : | FULL (Ø 27.6 ID)<br>BLACK/MUSTARD | 3 QTR (Ø 24.0 ID)<br>WHITE/OPAL | HALF (Ø 19.7 ID)<br>GREEN | OTHER :                  |
| ACCESS COVER (CIRCLE ONE) : | ALLOY CHEQUER PLATE               |                                 |                           | OTHER :                  |
| COMPLETED BY :              | SIGNED :                          |                                 |                           | DATE :                   |

**SW360 PRODUCTION DATA**

**OUTLET HOLE DETAILS :**  
(CIRCLE REQUIREMENT)

| OUTLET HOLE Ø | DIM A |
|---------------|-------|
| 275           | 190   |
| 300           | 180   |
| 350           | 220   |
| 400           | 225   |
| 500           | 260   |
| 600           | 315   |

DWG ISSUE No. :  
REQUIRED DATE :

- NOTES**
- MANHOLE UNIT FITTED WITH SWIFTLIFT ANCHOR POINTS (QTY 2). DO NOT EXCEED 60 DEGREE LIFT ANGLE.
  - UNIT SUPPLIED WITH OUTLET CORE DRILLED. INLET/S CORE DRILLED ON SITE BY OTHERS WITHIN RANGE SHOWN ON DRAWING.
  - SEALING / GROUTING OF MANHOLE COMPONENTS AND PIPES BY CONTRACTOR. ENSURING LOCAL CODES AND REGULATIONS ARE COMPLIED WITH.
  - ANY RISERS REQUIRED TO INCREASE THE DEPTH TO INVERT (DTI) FROM THAT AS DRAWN TO BE SUPPLIED BY THE CONTRACTOR.
  - FOR A DTI EXCEEDING 5m PLEASE CONTACT **0800STORMWATER**.
  - CONTRACTOR TO TAKE APPROPRIATE MEASURES TO PROTECT CARTRIDGES FROM CONSTRUCTION RELATED EROSION RUNOFF.
  - BACKFILL, BEDDING AND BUOYANCY DESIGN BY ENGINEER OF RECORD
  - QTY OF CARTRIDGES BY ENGINEER OF RECORD.
  - CONCRETE MANHOLE RISERS ARE DESIGNED AND MANUFACTURED IN ACCORDANCE WITH AS/NZS 4058 : 2007
  - CONCRETE MANHOLE BASES ARE DESIGNED AND MANUFACTURED IN ACCORDANCE WITH NZS 3101 : 2006 & NZS 3109 : 1997
  - ALUMINIUM LID / NON-TRAFFICABLE
  - FOR REQUIREMENTS OUTSIDE OF DRAWING SPECIFICATIONS PLEASE CONTACT **0800STORMWATER**.

**APPROX WEIGHTS**

MANHOLE SECTION INCLUDING CARTRIDGES : **4600 Kg**  
(AS DELIVERED, BASED ON QTY 10 ZPG CARTS)